

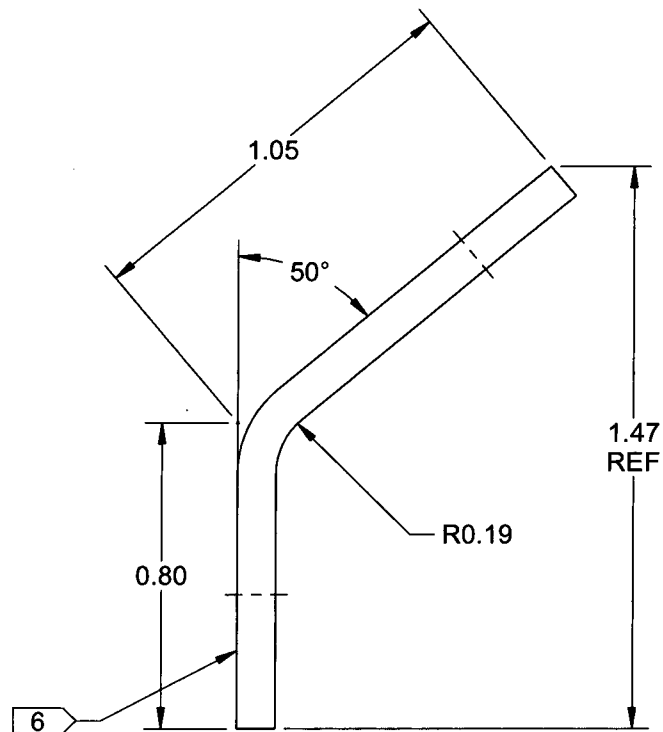


8 7 6 5 4 3 2 1

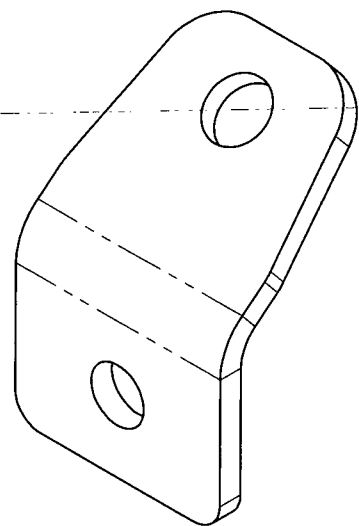

D5395-1 BRACKET
(MAKE FROM D5395-1F)

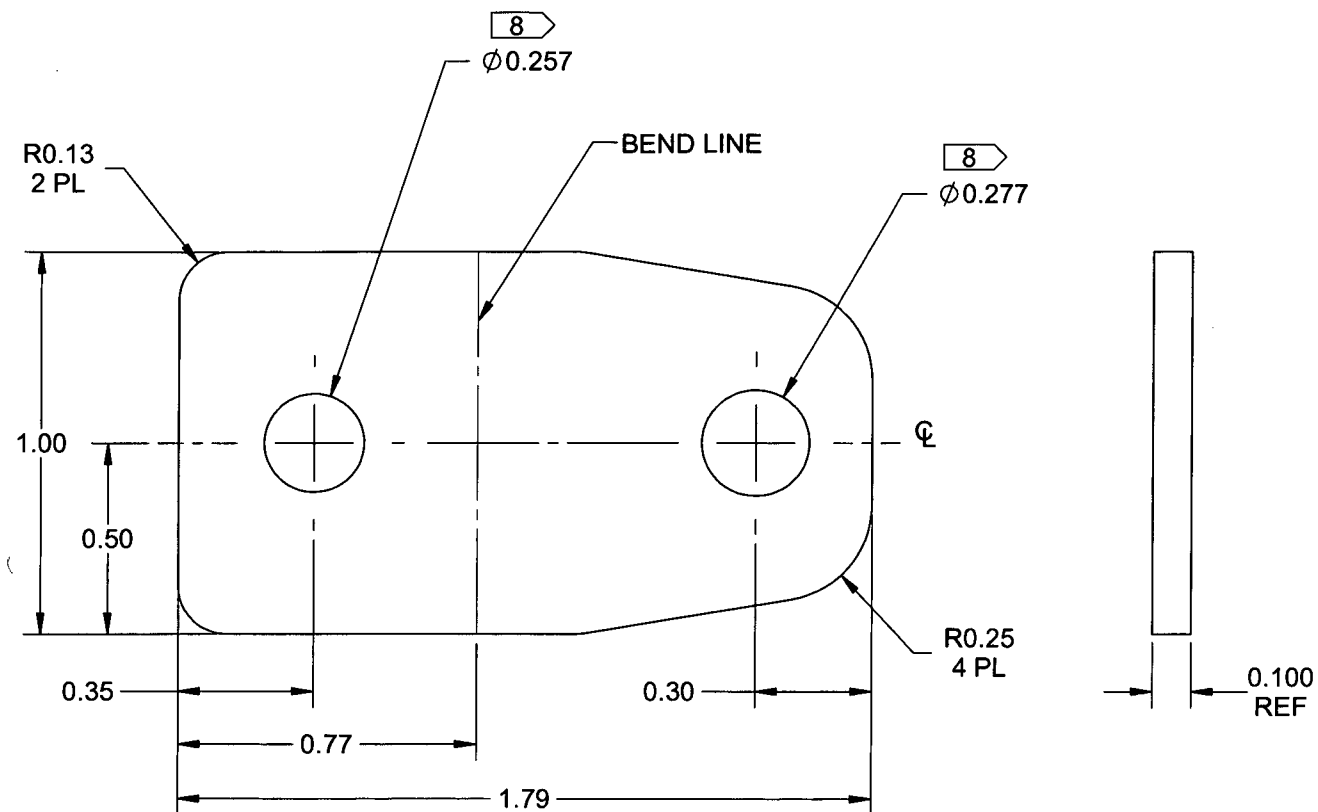

D5395-1F FLAT PATTERN

NOTES:

- 1) MATERIAL: AISI 303/304/316 STAINLESS STEEL SHEET, 0.100 THK, ANNEALED 2B FINISH
PER MIL-S-5059 OR AMS 5513/5524 OR ASTM A240 OR ASME SA240
REF. DART SPEC M304S12GA OR M303S12GA
- 2) FINISH: POWDER COAT WHITE (4.3.5.2) PER DART QSI 005 4.3
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: IDENTIFY PER QSI 044 6.1
- 7) WEIGHT: 0.04 lbs
- 8) MASK HOLES PRIOR TO POWDER COAT

RELEASED
2016-02-08
ECN16-520

APPROVED

A	NEW ISSUE	RF	16.01.27
REV.	DESCRIPTION	BY	DATE
DESIGN	RF	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	RF		
CHECKED	VS	DRAWING NO.	REV. A
MFG. APPR.	DD	D5395	SHEET 1 OF 1
APPROVED	HS	TITLE	SCALE
DE APPR.	DS	BRACKET	NTS
DATE	16.01.27	COPYRIGHT © 2015 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	